PRODUCT DATA SHEET



AMERICAN PLASTIC BOX


MODEL NUMBER	PSB120LV
CUBIC CAPACITY	20.5 Cubic Inches
DESCRIPTION	New Work; 2-Gang; Angled side nails; Dual Voltage Box/Bracket; 3/4" dia. Resi-Ring for Resi-Gard fitting. With Four Knockouts
MATERIAL	РРО
MOUNTING MEANS	Angled Side Nails
PRODUCTS SIZE L×W×D	4.04"×3.69"×3.67"
OUTER BOX SIZE L×W×D(CM)	54×34×29.5
STD. CTN. QTY.	100 Pcs
CERTIFICATIONS	ISO9001, ISO14001, ETL5010519, 2-hour fire rating
COLOR	Blue, Gray, Red Various Colors Can Be Customised



Various Colors Can Be Customised

FEATURES & BENEFITS

- Designed and listed for use with non-metallic sheathed cable in accordance with Article 314 of the National Electrical Code®, they make fast work of any residential or light commercial application.
- Non-metallic boxes feature PPO construction for easier installation, greater performance and lower installation cost.
- All PPO boxes are permissible for use with 90° C connectors.
- Wiring System Non-metallic sheathed cable.
- Various Colors Can Be Customised.
- ETL Listed and carries a 2-hour fire rating.

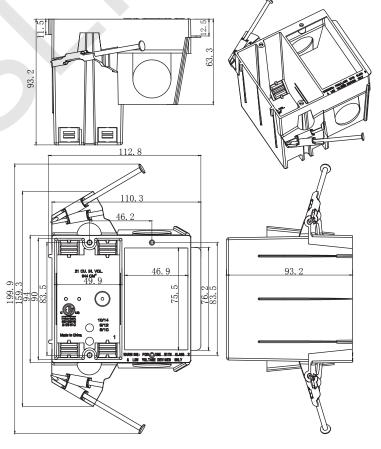

USLINSKY[®]

Tel: +86-21-67107908 Email: sales@linsky.cn Web: www.shlinsky.com

SHANGHAI LINSKY ELECTRICAL CO., LTD

Office Add: Room 1002, #2 Building, Phoenix Creativity Valley, Lane 1588 Huhang Highway, Fengxian District, SH Factory Add 1: No.29 Lane 1888 Daye Highway, Fengxian District, SH Factory Add 2: 48 km of National Road No.4 turn to 10.5 km of Road No.44.Phnom Penh, Cambodia

